



Product Data Sheet

**FilmTec™ SOAR 3000i Element**

**Description**

The FilmTec™ SOAR 3000i Element is an advanced element design that delivers high productivity and cleanability. This membrane chemistry delivers high quality permeate while removing many contaminants of concern at low operating pressures and is ideal for a wide range of applications including organics and trace contaminant removal for municipal water and wastewater plants.

Advantages:


- Combines versatility of patented DesaliTec™ CCRO process with DuPont's industry-leading FilmTec™ membrane innovation for even better reliability.
- Durable membrane with a cleaning tolerance over a wide pH range (pH 1-13) for consistent, long-lasting life.
- iLEC™ interlocking end caps, helping to reduce system operating costs and the risk of o-ring leaks that can cause poor water quality.

**Typical Properties**

FilmTec™ Element	Active Area ft <sup>2</sup> (m <sup>2</sup> )	Permeate Flow Rate gpd (m <sup>3</sup> /d)	Minimum Salt Rejection (%)
FilmTec™ SOAR 3000i	400 (37)	14,400 (55)	98.9

1. Permeate flow and salt rejection is based on the following standard test conditions: 2,000 ppm MgSO<sub>4</sub>, 100 psi (6.9 bar), 77°F (25°C), pH 8 and 20% recovery.
2. Flow rates for individual elements may vary but will be no more than +/- 15%.
3. Stabilized salt rejection is generally achieved within 24-48 hours of continuous use; depending upon feedwater characteristics and operating conditions.
4. Sales specifications may vary as design revisions take place.

**Element Dimensions**

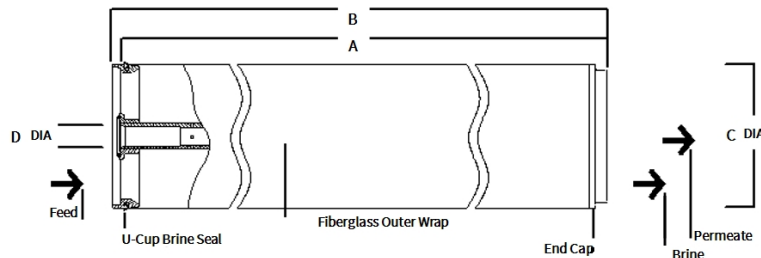

Dimensions – inches (mm)					1 inch = 25.4 mm
FilmTec™ Element	Feed Spacer (mil)	A inch (mm)	B inch (mm)	C inch (mm)	D inch (mm)
FilmTec™ SOAR 3000i	34	40.0 (1,016)	40.5 (1029)	7.9 (201)	1.125 ID (29)

1. Refer to [FilmTec™ Design Guidelines for multiple-element systems of 8-inch elements](#) (Form No. 45-D01695-en).
2. Element to fit nominal 8-inch (203 mm) I.D. pressure vessel
3. Individual elements with iLEC™ endcaps measure 40.5 inches (1,029 mm) in length (B). The net length (A) of the elements when connected is 40.0 inches (1,016 mm).

## Operating and Cleaning Limits

Membrane Type	Polyamide Thin Film Composite
Maximum Operating Temperature <sup>a</sup>	113 °F (45 °C)
Maximum Operating Pressure	600 psig (41 bar)
Maximum Element Pressure Drop	15 psig (1.0 bar)
pH Range	
Continuous Operation <sup>a</sup>	2 - 11
Short-Term Cleaning (30 min.) <sup>b</sup>	1 - 13
Maximum Feed Silt Density Index (SDI)	SDI 5
Free Chlorine Tolerance <sup>c</sup>	< 0.1 ppm

- a. Maximum temperature for continuous operation above pH 10 is 95 °F (35 °C)
- b. Refer to guidelines in [FilmTec™ Cleaning Guidelines](#) (Form No. 45-D01696-en) .
- c. Since oxidation damage is not covered under warranty, DuPont recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to [Dechlorinating Feedwater](#) (Form No. 45-D01569-en) for more information.

## Important Information

Please consider good operating practices for the optimal performance of the Reverse Osmosis membrane elements to assure damage free operation:

- [Loading of Pressure Vessels - Preparation & Element Loading](#) (Form No. 45-D01602-en)
- [Start-Up Sequence](#) (Form No. 45-D01609-en)
- [RO & NF Systems Shutdown](#) (Form No. 45-D01613-en)
- [Handling, Preservation, and Storage](#) (Form No. 45-D03716-en)

Full information of plant design, system operation and troubleshooting is given in the [FilmTec™ Reverse Osmosis Membranes Technical Manual](#) (Form No. 45-D01504-en).

## General Information

- Keep elements moist at all times after initial wetting.
- For successful operation of Reverse Osmosis (RO) and Nanofiltration (NF) membrane systems, the operation must follow the guidelines provided in the [FilmTec™ Reverse Osmosis / Nanofiltration Elements Operation Excellence and Limiting Conditions Tech Fact](#) (Form No. 45-D04388-en).
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Avoid static permeate-side backpressure at all times.
- Permeate obtained from the first hour of operation should be discarded.
- The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

## Regulatory Note

This product may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.

**Have a question? Contact us at:**

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. **NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.** No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

© 2022 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.

