




## Product Data Sheet

### **DuPont™ AmberTec™ UP9700 Ion Exchange Resin**

Semiconductor Grade macroporous Weak Base Anion Exchange Resin for demineralization applications

#### **Description**

DuPont™ AmberTec™ UP9700 Ion Exchange Resin is a macroporous, weak base anion exchange resin developed specifically for use in producing ultrapure water for the semiconductor industry. It is intended for use in packed bed and floating bed demineralization systems prior to reverse osmosis.



AmberTec™ UP9700 receives extra cleaning steps during the manufacturing process in order to reduce the quantity of trace leachable organic materials that are present in the standard industrial version. Therefore, it can immediately produce high-quality water in the first operation cycle.

The very stable structure and limited reversible swelling of AmberTec™ UP9700 make it very resistant to osmotic shock. The high degree of porosity of this resin provides efficient adsorption of large organic molecules, as well as their desorption during regeneration, thus allowing excellent protection against organic fouling of the strong base anion exchange resin.

#### **Applications**

- Demineralization, ideally when treating water with:
  - High organic fouling potential
  - High percentage of mineral acidity (FMA)
- Partial demineralization when weak acid removal is not required

#### **System Designs**

- Co-current
- Counter-current / Hold-down
- Layered beds

## Typical Properties

<b>Physical Properties</b>	
Copolymer	Styrene-divinylbenzene
Matrix	Macroporous
Type	Weak base anion
Functional Group	Tertiary amine
Physical Form	Off-white, opaque, spherical beads

---

<b>Chemical Properties</b>	
Ionic Form as Shipped	Free base (FB)
Total Exchange Capacity	≥ 1.3 eq/L
Water Retention Capacity	59.0 – 65.0%

---

<b>Particle Size</b> <sup>§</sup>	
Particle Diameter	630 - 830 μm
Uniformity Coefficient	≤ 1.3
< 300 μm	≤ 0.1%
> 1180μm	≤ 1.0%

---

<b>Stability</b>	
Swelling	FB → HCl ≤ 15%

---

<b>Density</b>	
Shipping Weight	670 g/L

---

---

For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 45-D00954-en).

## Suggested Operating Conditions

---

Temperature Range (FB form)	5 – 60°C (41 – 140°F)
-----------------------------	-----------------------

---

pH Range	
Service Cycle	0 – 6
Stable	0 – 14

---

---


For additional information regarding recommended minimum bed depth, operating conditions, and regeneration conditions for [separate beds](#) (Form No. 45-D01131-en) in water treatment, please refer to our Tech Fact.

## Hydraulic Characteristics


Estimated bed expansion of DuPont™ AmberTec™ UP9700 Ion Exchange Resin as a function of backwash flowrate and temperature is shown in Figure 1.

Estimated pressure drop for AmberTec™ UP9700 as a function of service flowrate and temperature is shown in Figure 2. These pressure drop expectations are valid at the start of the service run with clean water and a well-classified bed.

**Figure 1: Backwash Expansion**  
Temperature = 10 – 60°C (50 – 140°F)

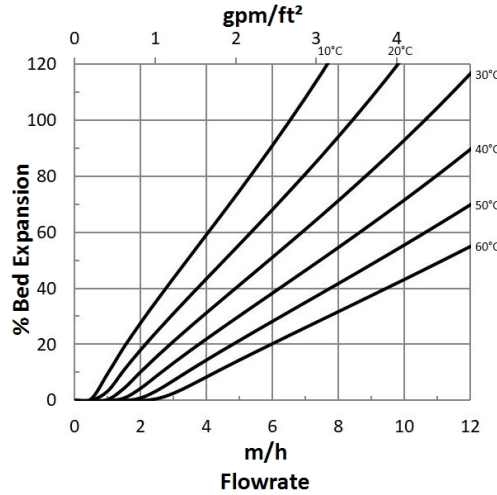

**Figure 2: Pressure Drop**  
Temperature = 10 – 60°C (50 – 140°F)

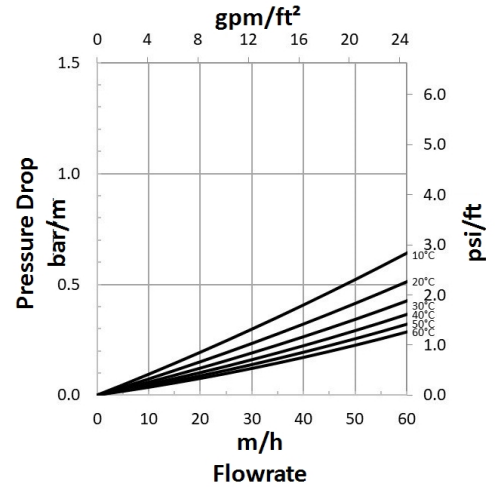


## Quality Assurance

AmberTec™ UP9700 Ion Exchange Resin is tested by DuPont for total organic carbon (TOC) rinse down. This ensures that all batches of AmberTec™ UP9700 will meet stringent ultrapure water (UPW) performance requirements on these most critical parameters.

DuPont Water Solutions will fully support the quality and performance of AmberTec™ UP9700 in UPW applications to assure full customer satisfaction with the product as delivered.

Typical rinse curve for total organic carbon (TOC) as a function of rinse time based on our quality control procedure for AmberTec™ UP9700 is shown in Figure 3.

**Figure 3: TOC Rinse-down**

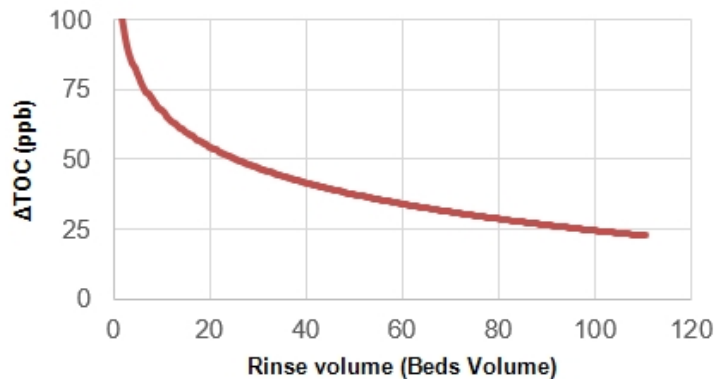

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

© 2023 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.

