



DuPont™ AmberLite™ XAD™1180N Polymeric Adsorbent

Macroporous, Adsorbent Resin

Key Features

- Hydrophobic, polymer.
- Macroporous structure with a high surface area.
- Excellent physical, chemical, and thermal stability through repeated cycles, in either column or batch modes.

Key Applications

- Recovery and purification of antibiotics, water-soluble steroids, enzymes and proteins
- Recovery of plant extracts
- Enzyme immobilization
- Separation of non-polar organic solutes from polar solvents

Typical Properties

Physical Properties	
Copolymer	Crosslinked DVB
Matrix	Macroporous
Type	Adsorbent
Physical Form	White, opaque, spherical beads
Nitrogen BET	
Surface Area	~ 600 m ² /g
Average Pore Diameter	~ 400 Å
Total Pore Volume	~ 1.5 cc/g
Chemical Properties	
Ionic Form as Shipped	Not applicable
Total Exchange Capacity	Not applicable
Water Retention Capacity	61 – 67%
Particle Size [§]	
Particle Diameter	350 – 600 µm
< 250 µm	≤ 5.0%
> 850 µm	≤ 10.0%
Swelling (in solvent)	
Methanol	10%
2-Propanol	15%
Acetone	10%
p-Xylene (via methanol)	10%
Density	
Particle Density	1.015 – 1.025 g/mL
Shipping Weight	~660 g/L

Suggested Operating Conditions

Maximum Operating Temperature	150°C (302°F)
pH Range (Stable)	1 – 14
Bed Depth, min.	
Capture	750 mm (2.5 ft)
Chromatography	1500 mm (4.9 ft)
Flowrates	
Loading	2 – 16 BV*/h (usually)
Elution/Desorption	1 – 4 BV/h
Regeneration	1 – 4 BV/h
Rinse	1 – 8 BV/h
Regenerants or Eluting Agents	<ul style="list-style-type: none">• Water-miscible organic solvents (methanol, ethanol, isopropanol, acetone, etc.) for hydrophobic compounds• Pure solvents for regenerating resin fouled by oils and antifoams• Dilute bases (0.1 – 0.5% NaOH) for weakly acidic compounds• Strong bases (2 – 4% NaOH) for regenerating resins fouled with proteins, peptides• Dilute acids (0.1 – 0.5% HCl) for weakly basic compounds• Dilute oxidizing agents (< 0.5%) such as peroxide to enhance the removal of protein fouling• Buffer elution for pH-sensitive compounds• Water when adsorption is from an ionic solution• Hot nitrogen or steam for volatile materials

* 1 BV (Bed Volume) = 1 m³ solution per m³ resin or 7.5 gal per ft³ resin

[§] For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 45-D00954-en).

Hydraulic Characteristics

Estimated bed expansion of DuPont™ AmberLite™ XAD™1180N Polymeric Adsorbent as a function of backwash flowrate and temperature is shown in Figure 1.

Estimated pressure drop for AmberLite™ XAD™1180N as a function of service flowrate and water temperature is shown in Figure 2. These pressure drop expectations are valid at the start of the service run with clean feed and a well-classified bed.

Figure 1: Backwash Expansion

Temperature = 10 – 60°C (50 – 140°F)


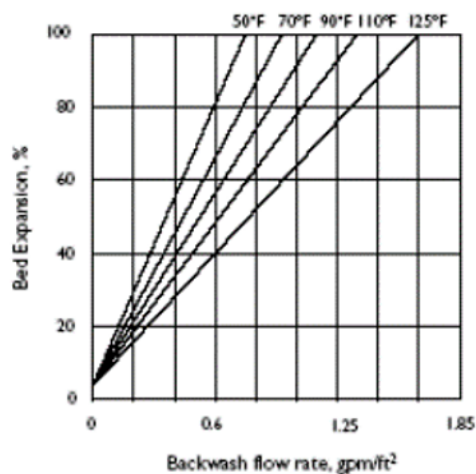


Figure 2: Pressure Drop

Temperature = 4.4 – 65.6°C (40 – 150°F)

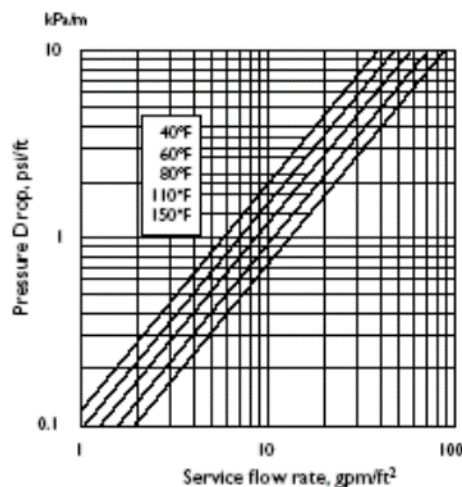

General Information

Pretreatment

DuPont™ AmberLite™ XAD™1180N Polymeric Adsorbent is shipped as a water-wet product imbibed with sodium chloride (NaCl) and sodium carbonate (Na₂CO₃) salts to inhibit bacterial growth. These salts must be washed from the adsorbent prior to use and it is suggested that this be achieved by washing with water at a linear flowrate of 5 – 10 m/h until the required level is achieved. In some sensitive applications, residual monomeric or oligomeric compounds may be required to be removed from the adsorbent. A regeneration with the proposed regenerant is also recommended prior to beginning the first service cycle. If the regenerant is an alcohol, it must be displaced with water prior to beginning the first loading cycle.

Important Information

- Polymeric adsorbents, as produced, contain by-products resulting from the manufacturing process. The user must determine the extent to which organic by-product must be removed for any particular use and establish techniques to assure that the appropriate level of purity is achieved for that use.
- Like any chromatographic stationary phase, a conditioning step with the working solvent must be performed before operation.
- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.



All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

Have a question? Contact us at:
www.dupont.com/water/contact-us

©2023 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.

Form No. 45-D00777-en, Rev. 6
May 2023